

OMRON

Smart Laser Head(CMOS)

Model E3NC-SH Series

INSTRUCTION SHEET

Thank you for selecting OMRON product. This sheet primarily describes precautions required in installing and operating the product.

TRACEABILITY INFORMATION: Representative in EU: OMRON EUROPE B.V. ... Manufacturer: OMRON CORPORATION, SHIOKAWA, KYOTO

The following notice applies only to products that carry the CE mark: Notice: This is a Class A product. In residential areas it may cause radio interference.

© OMRON Corporation 2012-2014 All Rights Reserved.

PRECAUTIONS ON SAFETY

Keys to Warning Symbols

WARNING Indicates a potentially hazardous situation which, if not avoided, will result in minor or moderate injury, or may result in serious injury or death.

Explanation of signs

- Laser beam: Cautions to indicate potential Laser beam hazard. Resolution prohibition: Indicates prohibition when there is a risk of minor injury from electrical shock or other source if the product is disassembled.

SAFETY PRECAUTIONS FOR USING LASER EQUIPMENT

The E3NC-LH use a laser as the light source. Lasers are classified based on EN standard (EN 60825-1)

Alert Statements

E3NC-SH Sensor Head: Class1 / E3NC-SH Sensor Head: Class2

WARNING

Do not expose your eyes to the laser radiation either directly (i.e., after reflection from a mirror or shiny surface). Loss of sight may possibly occur in case of the exposure to laser high power density.

Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure. Attention - L'utilisation des commandes ou réglages ou l'exécution des procédures autres que celles spécifiées dans les présentes exigences peuvent être la cause d'une exposition à un rayonnement dangereux

Do not disassemble the product. Doing so may cause the laser beam to leak, resulting in the danger of visual impairment.

The E3NC-SH has the following WARNING label or explanatory label on the side of the sensors.

When using devices in which E3NC-SH is installed in the U.S., the devices are subjected to the U.S. FDA (Food and Drug Administration) laser regulations. E3NC-SH series is classified into class 1 or class 2 by the standard of IEC/EN60825-1 according to deviations of Laser Notice NO.50 of this standard, and is already reported to CDRH(Center for Devices and Radiological Health).

For countries other than Japan, replace the WARNING label with the corresponding English label. (supplied with SH Series)

Using in Europe: The E3NC-SH is categorized as a Class 1 or Class 2 device as stipulated in EN60825-1.

E3NC-SH Explanatory Label



E3NC-SH Laser WARNING Label



Authentication label



PRECAUTIONS FOR SAFE USE

Please observe the following precautions for safe use of the products.

- (1) Installation Environment: Do not use the product in environments where it can be exposed to inflammable/explosive gas. (2) Power Supply and Wiring: Be sure to use a dedicated amplifier unit (E3NC-SA). (3) Installation: Use screws for mounting and be sure to tighten screws with a specified torque. (4) Other Rules: Do not attempt to disassemble, deform by pressure, incinerate, repair, or modify this product.

The E3NC-SH series sensor head accessories shall be used with the E3NC-SA amplifiers. These amplifiers and sensor head accessories shall be installed within a suitable enclosure where all components, including cords and connectors, shall be entirely contained within the same enclosure.

PRECAUTIONS FOR CORRECT USE

Please observe the following precautions to prevent failure to operate, malfunctions, or undesirable effects on product performance.

- (1) Do not install the product in locations subjected to the following conditions: Surrounding air temperature outside the rating, Rapid temperature fluctuations, Relative humidity outside the range of 35 to 85%, Presence of corrosive or flammable gases, Presence of dust, salt, or iron particles, Direct vibration or shock, Reflection of intense light, Direct sunlight or near heaters, Water, oil, or chemical fumes or spray, or mist atmospheres, Strong magnetic or electric field. (2) Warming Up: The circuitry is not stable immediately after turning the power ON. (3) Maintenance and inspection: Always turn off the power of the unit before connecting or disconnecting cables. (4) Sensing Object For Reflective Type Sensor Head: The product cannot accurately measure the following types of objects: Transparent objects, objects with an extremely low reflective sensor ratio, objects smaller than the spot diameter, objects with a large curvature, excessively inclined objects, etc.

Checking the package contents

- Sensor head x1 • Manual (this paper) x1 • Laser WARNING label : 1 (English)(The WARNING label is attached to E3NC-SH)

Shortening the connection cable for use (The shortened cable has not been evaluated by UL.)

Procedure to remove the connector

Push the operation lever at the operation slot with the slotted screwdriver and pull out the wire to adjust the cable length. The tip of the screwdriver must be 2 mm or less. The type of screwdriver whose tip width becomes broaden toward its root cannot be used.


Procedure to connect the connector

- (1) According to "STRIP GAUGE" shown on the side of the product, strip the coating of the shield for 20 mm or less, strip the coating of the core wire for 7 to 8 mm, and twist the wire for several times.


(2) Insert the wire all the way to the wire insertion slot. Make sure that the wire coating is located inside the wire inserting slot and the tip of the conductor passes through the connection part. Connect wires as follows. Terminal No.1: Shield (Red, White sides), No.2: White, No.3: Red, No.4: Brown, No.5: Blue, No.6: Shield (Brown, Blue side).

- (3) Push the slotted screwdriver all the way to the releasing slot and pry the slotted screwdriver up and down lightly. When you feel a click on the slotted screwdriver, pry it to the reverse direction of the wire insertion direction. The operation lever will recover with a click sound.


- (4) Check that the operation lever recovers and the wire coating enters into the wire insertion slot. The shield wire cover must not be shorted circuited. (The wires are connected when you pull the wire and feel a resistance.)

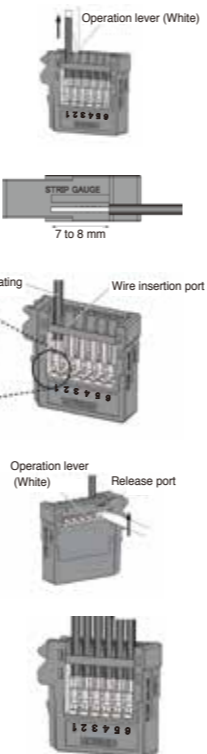

1. Dimensions

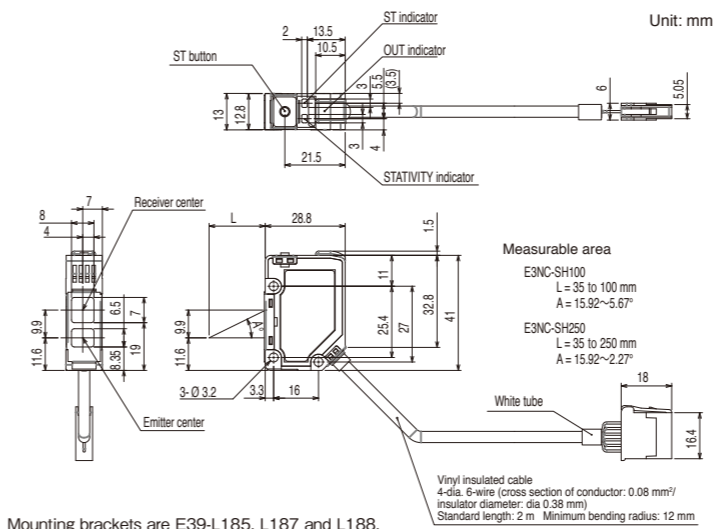


2. Sensor Head Display

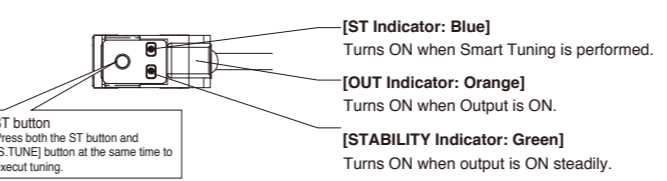


3. Installing Sensor Heads

Fix the Reflective type sensor head with screws (M3). (tightening torque: M3, 0.3 N·m)

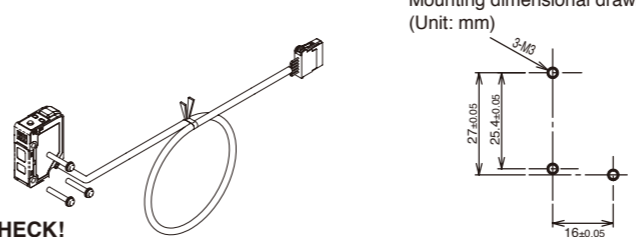

CHECK!


When mounting a Sensor Head, take care not to touch the emitter and receiver. Adhesion of finger marks may hinder correct measurements. If you have touched them, wipe them with a clean soft cloth.

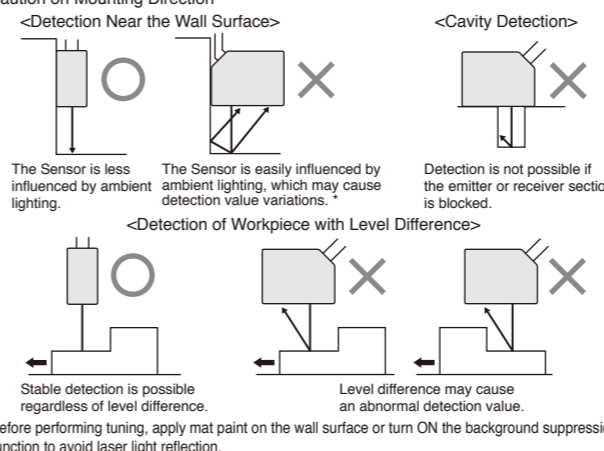

4. Mounting the sensor head

- 1. Open the protection cover. 2. Insert the sensor head, with the lock lever on its connector area facing upward, all the way into the connector port. To remove it, press and hold the lock lever then pull the sensor head out.

The connector cover of E3NC-SH is white. Connect the cable correctly.

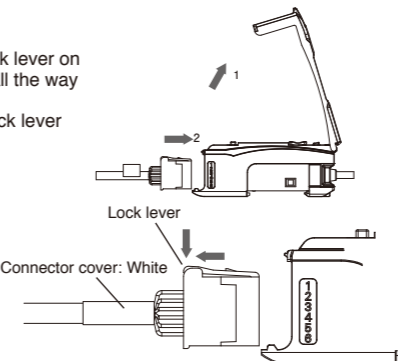

5. Specifications

Table with 4 columns: Item, Detection method, Distance configuration model, and various technical specifications like Light source, FDA class, Measurement range, etc.

*1. The E3NC-SH is classified into Class 1 or Class 2 by the standard of EN60825-1 according to deviations of Laser Notice No.50 of FDA standard, and is already reported to CDRH(Center for Devices and Radiological Health).

Suitability for Use

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

OMRON Corporation Industrial Automation Company Tokyo, JAPAN Contact: www.ia.omron.com Regional Headquarters: OMRON EUROPE B.V., OMRON ELECTRONICS LLC, OMRON ASIA PACIFIC PTE. LTD., OMRON (CHINA) CO., LTD.

